


### **CECCATO HISTORY**

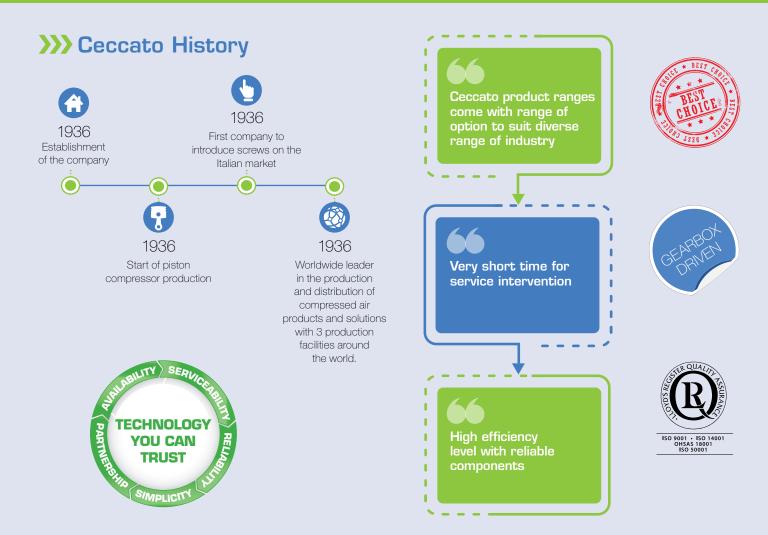

## Customer benefits: CSM 5.5-50, DRD 40-50

Gearbox driven compressors are suitable for use with a variety of constant speed or variable speed drivers. Local energy costs and application requirements will determine the most economical method of drive for your application. We offer you:

- Easy maintenance
- User-friendly operation
- Simple installation
- Highest performance for less energy consumption
- Lower maintenance cost
- No transmission losses

# >>> Components

















Element

Air filter







# FIXED SPEED COMPRESSOR 5.5-50HP/4-37KW



#### Technical data

Model	3	Hip		<b>=</b>		<b>I</b> ()	_	Ø	М
	Pressure	Motor		Capacity*		Noise	Weight	Connection	Dimension
	Мра	hp	kW	I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
CSM 5.5	0.8 1.0	5.5	4	10 9	20 18	63	152	1/2	650x650x890
CSM 7.5	0.8 1.0	7.5	5.5	14 11	29 24	63	166	1/2	650x650x890
CSM 10	0.8 1.0	10	7.5	19 15	40 32	63	175	1/2	650x650x890
CSM 15	0.7 0.8 1	15	11	30 30 23	63 63 48	69	293	3/4	850x790x1260
CSM 20	0.7 0.8 1	20	15	38 37 33	79 79 70	71	341	3/4	850x790x1260
CSM 25	0.7 0.8 1	25	18.5	51 50 43	107 106 91	73	364	1	850x790x1260
CSM 30	0.7 0.8 1	30	22	61 59 53	129 125 112	71	436	1	1150x850x1000
CSM 40	0.7 0.8 1	40	30	89 83 74	189 176 157	72	559	1 1/2	1430x950x1200
CSM 50	0.7 0.8 1	50	37	110 105 85	233 222 180	72	600	1 1/2	1430x950x1200
DRD 40	0.7 0.8 1	40	30	94 88 79	198 185 168	69	821	1 1/2	1723x980x1600
DRD 50	0.7 0.8 1	50	37	113 106 97	240 223 206	70	846	1 1/2	1723x980x1600

Model	Ø <b></b>		<b>-</b> )	· <b>=</b>		•	<u>^</u>	Ø	M
	Pressure	Motor		Capacity*		Noise	Weight	Connection	Dimension
	Мра	hp	kW	I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
CSM 5.5 TMDD	0.8 1.0	5.5	4	10 9	20 18	63	316	1/2	1547x650x1473
CSM 7.5 TMDD	0.8 1.0	7.5	5.5	14 11	29 24	63	330	1/2	1547x650x1473
CSM 10 TMDD	0.8 1.0	10	7.5	19 15	40 32	63	368	1/2	1547x650x1473
CSM 15 TMDD	0.7 0.8 1	15	11	30 30 23	63 63 48	69	430	1	1537x790x1784
CSM 20 TMDD	0.7 0.8 1	20	15	38 37 33	79 79 70	71	541	1	1565x790x1784
CSM 25 TMDD	0.7 0.8 1	25	18.5	51 50 43	107 106 91	73	564	1	1565x790x1784

 $<sup>^{\</sup>star}\text{Unit}$  performance measured according to ISO 1217. Annex C. latest edition and ISO 2151.

### **VARIABLE SPEED COMPRESSOR**

# >>> Your energy efficient and solid performance

# THE HIGH PERFORMANCE DRIVE TRAIN

- In-house design on oil-cooled permanent magnetic motor
- High performance and durable reliability
- Service free drive train.





# ROBUST, COMPACT AND USER-FRIENDLY FREQUENCY INVERTER

- Industrial inverter works on minimum start-up power consumption
- Contribute to minimum power consumption on lower and lower operation cost

#### **ES4000T TOUCH CONTROLLER**

- Large 4.3" HD graphic touch screen
- Integrated smart connectivity
- Built in online monitoring





#### SIMPLE MAINTENANCE

- Quick access to service
- Suction cooling air flow supports visual inspection with open-door

## VARIABLE SPEED DRD 10-50HP/7.5-37KW



## >>> Technical data

	0	Fig.		<b>=</b>		••	<u>•</u>	Ø	М
Model	Max. Pressure	Motor		Capacity*		Noise	Weight	Connection	Dimension
	Мра	hp kW		I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
CSMV 10	0.7-1.0	10	7.5	3.1-19	6.6-41	73	205	3/4	850x750x1000
CSMV 15	0.7-1.0	15	11	4.5-29	9.5-61	73	205	3/4	850x750x1000
CSMV 20	0.7-1.0	20	15	7.8-35	17-73	73	205	3/4	850x750x1000
CSMV 25	0.7-1.0	25	18.5	10-54	21-115	73	280	1	950x850x1080
CSMV 30	0.7-1.0	30	22	12-61	25-129	73	290	1	950x850x1080
CSMV 40	0.7-1.0	40	30	23-88	49-186	76	362	1 1/2	1130x950x1200
CSMV 50	0.7-1.0	50	37	31-107	66-226	77	416	1 1/2	1130x950*1200

	0	H		<u>=</u>		<b>■(</b> )		Ø	M
Model	Max. Pressure	Mc	Motor		Capacity*		Weight	Connection	Dimension
	Mpa	hp kW		I/S	cfm	dB(A)±2	KG	G	LxWxH (mm)
DRD 10 PM	0.7-1.3	10	7.5	3.3-20	7.0-42	70	230	3/4	1100x850 x1080
DRD 15 PM	0.7-1.3	15	11	5.3-30	11-64	70	231	3/4	1100x850x1080
DRD 20 PM	0.7-1.3	20	15	6.6-36	14-77	70	241	3/4	1100x850x1080
DRD 25 PM	0.7-1.3	25	18.5	10-57	21-120	70	313	1	1250x950x1180
DRD 30 PM	0.7-1.3	30	22	12-64	25-135	73	321	1	1250x950x1180
DRD 40 PM	0.7-1.3	40	30	22-94	47-199	74	412	1 1/2	1330x950x1200
DRD 50 PM	0.7-1.3	50	37	32-107	68-226	73	413	1 1/2	1330x950x1200

 $<sup>^{*}\</sup>mbox{Unit}$  performance measured according to ISO 1217. Annex C. latest edition and ISO 2151.

# >>> Variable speed control - Frequency inverter regulation

A frequency driven compressor has a working pattern with lower peaks and a smoother air profile. This is achieved by controlling the air delivery and producing only the amount of air for the customer's application at a daily lower and lower operation. The net pressure is maintained by use of a frequency inverter. As a result, the compressor consumes only the energy needed which is very cost efficient.





### REVOLUTIONARY DRIVE TRAIN TECHNOLOGY

# Improved energy efficiency saves you money

- » In-house designed iPM motor with iPM Super Premium Efficiency.
- » New generation screw elements, with improved efficiency.
- » Integrated direct drive transmission for minimal losses.
- » Smart inlet valve optimizes the inlet flow and improves efficiency.

# Increased reliability extends lifetime

- » iPM motor rated IP66, premium protection against dust and water ingress.
- » Globally renowned screw elements, proven in thousands of installations.
- » Optimal cooling at all speeds and conditions thanks to oil-cooling principle of the iPM motor.

# Maintenance-free design minimizes downtime and improves your productivity

- » Coupling-free direct drive design, no maintenance needed.
- » Smart inlet valve, no maintenance needed.

## >>> DRD 30 PM





Oil filter

Air filter



Oil separator


Motor



Cooler

# >>> We protect your efficiency

Energy costs represent about 70% of the total operating cost of your compressor over a 5 year period. That's why reducing the operating cost of a compressed air solution is a major focus. Variable frequency driven compressors can cut the energy bill of your compressor by up to 35%.

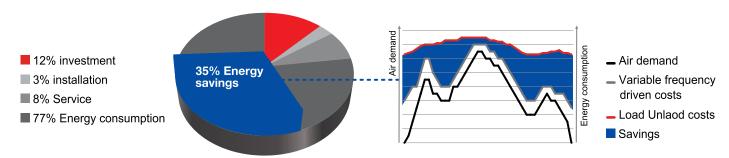



Only original parts extend your compressor's lifetime, reduce maintenance costs and maximize efficiency



## A TOTAL SOLUTION FOR YOUR QUALITY AIR

## >>> Complete compressor room solutions



#### Line Filters

» Purify the compressed air by eliminating oil/dust contaminants resulting in higher final product quality and an increase of your overall productivity.

#### Air Receiver

» Buffer storage for compressed air. Helps with condensate separation, pressure stabilization and more efficient operation of the compressor.

#### Oil Water Separator

Captures the oil in compressor condensate so it can be disposed of in an safe and environment-friendly way.

#### **AIRnet**

» Fast to install, reliable piping system, designed for compressed air applications offers lowest total cost of ownership.

# >>> Complete your compressed air installation with an ICONS plan

What if your compressor needs service or an immediate intervention? With an ICONS plan, you get an alert from your controller delivered straight to your computer, tablet or smartphone. Wherever you are, you can take immediate action and reduce the risk of downtime and other costs.



#### With connectivity



#### Without connectivity





- A high quality product offering you technology you can trust.
- Our products are easy to use and guarantee high reliability.
- Distributors are always nearby ensuring availability of both products and support.
- Choosing our high performance products entails a partnership that will boost your business.
- Safeguarding long-term productivity through optimal serviceability and use of original parts.



Oil-injected screw

Range CSM/DRD series

compressor

Fixed speed

Variable speed

# Care. Trust. Efficiency.

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

#### Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

#### Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.